

BULL624



RESIDENTIAL USE

- 230 Vac single-phase operator with built in control panel and encoder device
- Magnetic limit switches are available as accessory
- Fast and easy unlock device with a customized key

24 Vdc


- 24Vdc operator for intensive use with built-in control panel and encoder
- Prepared for battery back-up system
- Amperometric anticrushing control

Equipped with foundation plate


BENINCA
VALIGLE
2000

51

BULL624

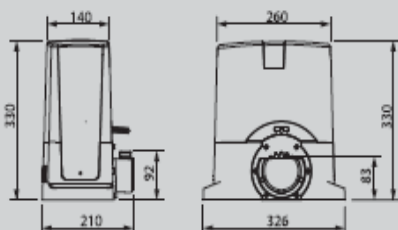

BULL8M

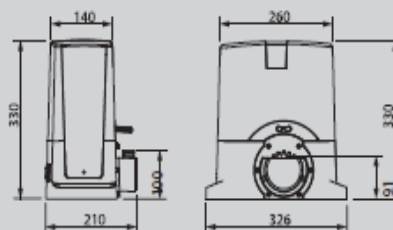

TECHNICAL DATA

BULL624

Power supply	230 Vac
Motor supply	24 Vdc
Absorbed Power	120 W
Max. absorbed current	0,5 A
Torque	20 Nm
Opening speed	10 m/min
Operation cycle	intensive use
Protection level	IP 44
Operating temp.	-20°C / +70°C
Max gate weight	600 Kg
Lubrication	Grease
Driving gear for rack	M4 Z14
Weight	10 Kg